


KINTER REFLECTION OF NATURAL BEAUTY UV

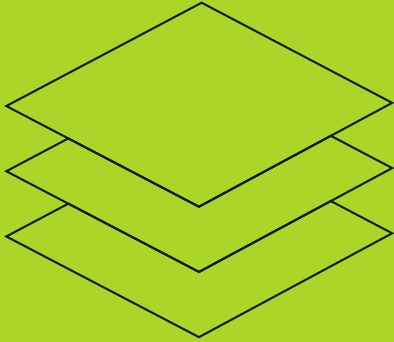

BIRCH PLYWOOD WITH
ULTRAVIOLET COATING
FOR CABINETS AND
DRAWERS

COMPLIANCE

CE CARB




KINTER


SAVES TIME
AND MONEY




5x5, 5x10,
8x4x8




READY FOR
USE



NATURAL
WOOD GRAIN



CUSTOMIZABLE
GLOSS

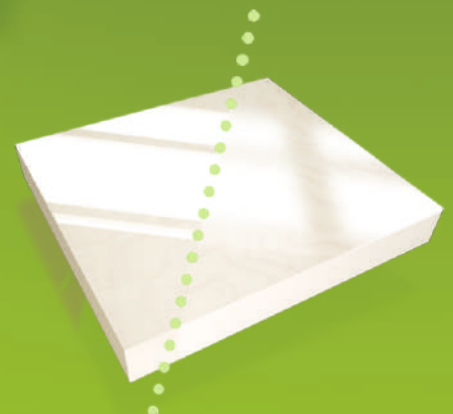

KINTERWOOD.COM

KINTER UV

ULTRAVIOLET COATING IS SPECIAL MULTILAYERED COATING WITH UV-CURED VARNISH THAT PROTECTS THE PLYWOOD PANEL FROM DAMAGE WHILE ENSURING BEAUTIFUL APPEARANCE.

KINTER UV is ready for cutting and making cabinets, drawers, and interior elements, helping to save time and labor for preparation.

The UV-cured varnish is available in different shades, colors, and gloss levels, while bringing out the natural grain beauty of wood.

KINTER UV is certified as compliant with internationally recognized formaldehyde emissions regulations such as DIN EN ISO 12460-3, CARB ATCM.

Applications: drawer sides, cabinet furniture, interior decoration.



TECHNICAL SPECIFICATIONS

Surface	Plywood with uniform UV-cured finish
Panel sizes, mm	1220×2440; 1250×2500 [4×8]; 1500/1525×3000/3050 [5×10]MR [Interior], WBP [Exterior]
Glue	6; 6,5; 8; 9; 10; 12; 15; 18; 19
Thickness, mm	B/B, B/BB, BB/BB [UV coating on both sides]; B/CP, BB/CP [UV coating on one side]
Grade	Oval, butterfly
Patching	UV-cured transparent varnish on one or two sides
Coating	Transparent [no color] or tinted [according to customer's specifications]
Varnish	
Base plywood	Pre-treated plywood panel: Sanded at 400 grit Coated with medium-gloss [35% (±5)] material
Gloss [according to customer's specifications]	UV High - 80% (±5) UV Medium - 35% (±5) UV Low - 20% (±5) UV Special - gloss according to customer's specifications (±5)

Note: The color and other specifications of the coating must be agreed with the customer before the order is put into production.

COMPLIANCE



KINTER